



# CITIBUS

Manufactured by Anadolu Isuzu  
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

# ISUZU CITIBUS

## TECHNICAL SPECIFICATIONS

### Dimensions (mm)

Maximum Length	9515
Maximum Width	2409
Maximum Height	3117 (w A/C)
Wheelbase	4435
Front Overhang	2135
Rear Overhang	2945

### Weights (kg)

Gross Vehicle Weight	13500
----------------------	-------

### Engine

Model	CUMMINS B4.5E6D210B
Type	Commonrail Turbo Diesel Intercooler
Number of Cylinders	4
Displacement (cc)	4500
Maximum Power (kw(PS)/rpm)	157 (211) / 2300
Maximum Torque (Nm/rpm)	850 /1200-1500
Emission Standard	Euro VI OBD-D

### Transmission

Model	AT: Allison T 280 R
Number of Gears	6 Forward, 1 Reverse; Overdrive

### Steering System

Tyres	Hydraulic
Tyre Sizes	265/70 R19,5

### Suspension

Front	Independent Air Suspension - 2 Air Bellows
Rear	Air Suspension - 4 Air Springs
Anti Roll Bar	S
Kneeling System	S (ECAS)

### Brake System

Front / Rear	Disc / Disc
System	Full Air Brake System with EBS and ABS, Dual Circuit, Auto-Adjusted
	Air Actuated Acted on the Rear Axle Retarder

### Fuel Tank


Fuel Tank Capacity (lt)	215
Addblue Tank (lt)	30

### Electrical System

Battery	24V (2X12V) - 150 Ah
---------	----------------------

### Passenger Capacity\*

Maximum Passenger Capacity	76 Passengers
Standard Layout	25 Seated (1 Foldable) + 43 Standing (3 Doors)
	25 Seated + 47 Standing (2 Doors)

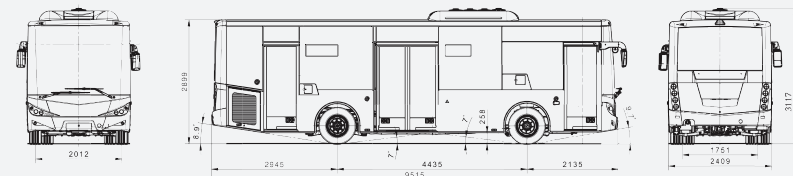

## EQUIPMENTS

### Heating and Ventilation

Pre Heater	Opt
Fan Heater	S (front, middle and rear)

### Air Conditioner

Digital Air Conditioner	S
A/C Dashboard Nozzle Diffuser for Driver	S
Tropical A/C	Opt

### Safety & Driving Comfort

Speed Limitor	Opt
Tachograph	S
ABS	S
ASR	S
EBS	S
Bus Stop Brake (BSB)	S
Retarder	S
Spare Wheel	S
Roof Hatch for Ventilation & Emergency Exit	S
Reverse Gear Warning Beeper	S
Fire Extinguisher	S
Engine Compartment Fire Detection System	S
Engine Compartment Fire Detection and Automatic Fire Supression System	Opt
Fog Lamps	S (Front and Rear)
Rear View Camera	Opt
Front View Camera	Opt
Interior Camera	Opt

### Exterior

Metallic Paint	Opt
Towing Device	S (Front)

### Doors

Number of Service Doors	3 Doors (S), 2 Doors (Opt)
Type of Service Doors	Front: Single Wing Air Power Actuated Inside Opening Mechanism Middle: Double Wing Air Power Actuated Inside Opening Mechanism Rear: Single Wing Air Power Actuated Inside Opening Mechanism (3 doors) S (Middle Door With Sensor)
Wheelchair / Strollers Ramp	S
Remote Control	S

### Windows

Passenger Windows	One Piece 1/3 Sliding Window on Each Side, Single Glazed (S) Double Glazed (Opt) Double Glazed (S) Sliding, Single Glazed With Heater (S) Windshield Blind (S), Driver Curtain (Opt)
-------------------	--

### Interior

#### Driver Seat

Driver's Seat	Ergonomic, Air Operated, Adjustable
Electrically Controlled and Heated Side Mirrors	Heated (S), Electrically Controlled (Opt)
Ticket Validator Preperation	Opt
USB Charger for Driver	S

#### Passenger Compartment

Backrest (for Standing Passengers)	S
USB Charger for Passangers	Opt

### Lightening & Signalization

Interior Ceiling Lighting	S (Continuous Type With LED)
Digital Destination Display	Slither Route Display (S), Rear Route Indicator Panel (S), Colored Front Route Indicator Panel (Opt)

### Audio & Visual

Radio & MP3	Radio (S), MP3 (Opt)
DVD	Opt
Monitor / LCD Screen (Passenger Compartment)	Opt ( Front, Side, Rear)
Digital Clock	S

S: Standard Opt: Optional

\* Different seating variations are available.

ANADOLU ISUZU

