



ISUZU NOVOciti

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.



ISUZU NOVOciti

TECHNICAL SPECIFICATIONS

Dimensions (mm)

Maximum Length	7502
Maximum Width	2275
Maximum Height	3136 (w/o A/C), 3332 (w A/C)
Wheelbase	3385
Front Overhang	1655
Rear Overhang	2462

Weights (kg)

Gross Vehicle Weight	9800
----------------------	------

Engine

Model	ISUZU 4HK1
Type	Commonrail Turbo Dizel Intercooler
Number of Cylinders	4
Displacement (cc)	5193
Maximum Power (kw(PS)/rpm)	140 (190) / 2600
Maximum Torque (Nm/rpm)	510 /1600-2600
Emission Standard	Euro VI OBD-D

Transmission

Model	MT: MZZ-6F (S) AMT: ISUZU NEES (Opt)
Number of Gears	6 Forward, 1 Reverse; Overdrive

Steering System

Tyres

Tyre Sizes	215/75 R17,5
------------	--------------

Suspension

Front	Parabolic Steel Alloy Leaf Springs
Rear	Air Suspension
Anti Roll Bar	Front and Rear (S)
Kneeling System	S (ECAS on rear axle)

Brake System

Front / Rear	Disc / Disc
System	Full Air Brake System With Automatic Adjuster Dual Circuit and ABS
Parking Brake	Air Actuated, Operating on Rear Axle
Auxiliary Brake	Vacuum Assisted Exhaust Brake

Fuel Tank


Fuel Tank Capacity (lt)	100 lt (Spare Wheel on Chassis) (Opt), 130 lt (Spare Wheel on Bus) (S)
Adblue Tank (lt)	16,5

Electrical System

Battery	24V (2X12V) - 105 Ah
---------	----------------------

Passenger Capacity*

Maximum Passenger Capacity	55 Passengers
Standard Layout	21 Seated (4 Foldable) + 21 Standing

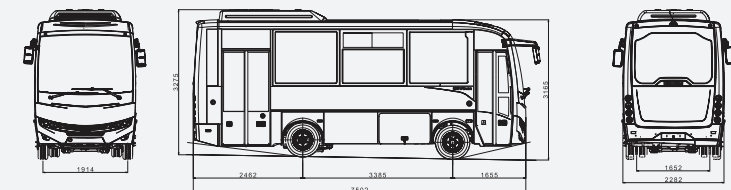

EQUIPMENTS

Heating and Ventilation

Pre Heater	Opt
Fan Heater (Front/Middle/Rear)	S

Air Conditioner

Digital Air Conditioner	S
A/C Dashboard Nozzle Diffuser for Driver	S
Tropical A/C	Opt

Safety & Driving Comfort

Speed Limitor	S
Tachograph (Smart)	S
ABS	S
ASR	S
Bus Stop Brake (BSB)	Opt
Retarder	Opt
Parking Sensor	Opt
Spare Wheel	S
Roof Hatch for Ventilation & Emergency Exit	S
Reverse Gear Warning Beeper	S
Fire Extinguisher	S
Engine Compartment Fire Detection System	Opt
Engine Compartment Fire Detection and Automatic Fire Supression System	Opt
Fog Lamps	S (Rear), Opt (Front)
Day Time Running Lamps (DRL)	S
Rear View Camera	Opt
Front View Camera	Opt
Interior Camera	Opt

Exterior

Metallic Paint	Opt
Towing Device	S (Front)

Doors

Number of Service Doors	2 Doors
Type of Service Doors	Front: Double Wing Outwards Movement Rear: Double Wing Outwards Movement
Wheelchair / Strollers Ramp	S
Remote Control	S

Windows

Passenger Windows	One Piece, Coloured Sliding, Single Glazed (S) Double Glazed (Opt)
Front Door Window	Single Glazed (S)
Driver's Window	Sliding, Double Glazed (S)
Windshild Blind	S (Manuel)

Interior

Driver Seat

Driver's Seat	Air Actuated Adjustable
Electrically Controlled and Heated Side Mirrors	Opt
Close-Proximity Exterior Mirror	S (Right)
Driver's Cabin	FRP Door, Open Handrail Type; Semi Glass (Opt), Full Glass (Opt)

Ticket Box Brackets	S
USB Charger for Driver	S

Lightening & Signalization

Interior Ceiling Lighting	On the Roof, Continuous
Digital Destination Display	Front, Side (S)

Audio & Visual

Radio & MP3	Radio (S), MP3 (Opt)
DVD	Opt
Digital Clock	S

S: Standard Opt: Optional

* Different seating variations are available.

ANADOLU ISUZU

January 2020

Anadolu Isuzu reserves the right to make changes in the specifications and the design of the products without prior notice.

