

New

Screw Mounting

40' High Cube Container Carrier Semi - Trailer



- ✓ Quality
- ✓ Safety
- ✓ Performance
- ✓ Economic



40' High Cube Container Carrier Semi - Trailer

Chassis and Equipments

- Chassis made of high strength S700MC quality steel.
- The frame assembly was manufactured by the method bolted.
- Foldable type side underrun guards. According to UN Regulation: R73..
- 2" King Pin, R55 regülasyonuna uygun.
- Rear bumper fixed type / rear underrun protection. According to UN Regulation: R58.

Axle and Suspension System

- 3 x 9000 kg capacity, 360 mm suspension bellows, disc brake axles.
- First axle lifting, automatically.

Landing Gear

Double speed, 24 tons capacity mechanical, one-side controlled.

Wheel Tyre and Rim

6+1 units, 385/55 R22,5 tyres. 22,5x11,75 offset 120 steel wheels.

Brake System

EBS 2S/2M double circuit brake system with ABS and RSS (Roll Stability Support); brakes according to UN Regulation: R13.

Container Transport

ISO Container 2x20', 1x30', 1x40' ISO, 1x40' High Cube.

Electrical System

2x7 and /or 1x15 pins plug socket. 24V lighting system according to UN Regulation: R48.



Surface Protection

Chassis and components made of steel are protected from corrosion by cathodic coating.

Signs and Plates

- R70 regulation according to the rear reflector. 2 units.
- Reflective tapes application.

Standard Accessories


- Plastic tool box lockable. 1 unit.
- Tracking help.
- Rear protection bumper. 2 units.
- Wheelchocks and holders. 2 units.
- Basket type spare tire carrier - for one unit spare tyre.
- Anti-spray Half type mudguard. According to 109/2011 EEC regulation. 6 pcs.
- Wheel wrench and lever. 1 unit.
- Fire extinguisher and cabinet. 1 unit.
- Briefcase and technical documents. 1 unit.

Optional Features

- 60 liter water tank; made of stainless steel.
- Plastic water tank.
- Additional basket type spare tire carrier.
- Smartboard or TIM (km, axle loading, diagnose).

Technical Description

- Additional equipments are not considered.
- The manufacturer reserves the right to change model, technical specification and accessories without prior notice.

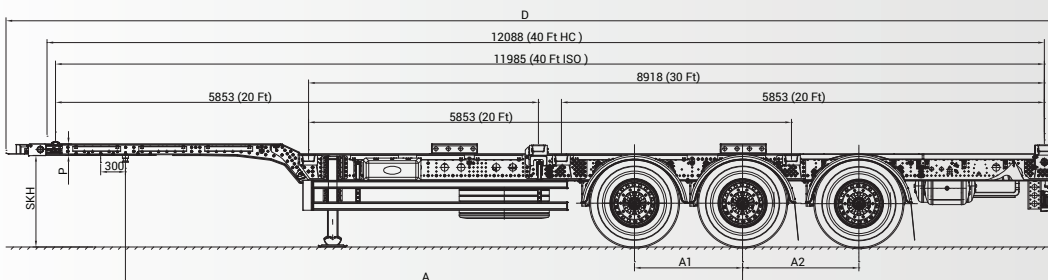

External width	-	2.550 mm
External length	D	12.814 mm
5.th wheel's height (unload and on flat ground)	SKH	1.110 mm
According to ISO 1726	-	1.080-1.230 mm
Gooseneck height	P	140 mm
Wheelbase	A	7.480 mm
Axle base	A1-A2	1.310-1.410 mm
Tare weight (+/- %3)	-	4.900 kg

Koluman Otomotiv End. A.Ş.
Factory;
 Şahin Mah., Sait Polat Bulvarı,
 No: 386, C - Blok,
Tarsus - MERSİN - TURKEY
T. +9(0) 324 651 0020
F. +9(0) 324 651 4602

Ankara Local Dealer;
Ehlibeyt Mahallesi,
Mevlana Bulvarı,
No. 199/A
Çankaya - ANKARA - TURKEY
P. +9(0) 312 583 7300
F. +9(0) 312 473 7041/42

Ankara Local Dealer;
Karacaoğlu Mahallesi,
Ankara Caddesi,
No. 207-209
Gölbaşı - ANKARA - TURKEY
P. +9(0) 312 497 5500
F. +9(0) 312 497 5541

İstanbul Local Dealer;
Yakacık Caddesi,
Ortađ Mevki, No.33
Sancaktepe - Kartal
İSTANBUL - TURKEY
P. +9(0) 216 311 8050
F. +9(0) 216 311 8229

Gaziantep Local Dealer;
Otoyol Org. San. Çıkışı,
Gaziantep Cad. No.117
Aktoprak - Şehitkamil
GAZİANTEP - TURKEY
P. +9(0) 342 437 8500
F. +9(0) 342 437 8400

Mersin Local Dealer;
Yenice Otoyol Çıkışı,
Yenice - Tarsus

MERSİN - TURKEY
P. +9(0)324 651 4242
F. +9(0) 324 651 4245

www.koluman.com.tr

www.koluman-otomotiv.com.tr